

Ethernet Super Slim 10Base 5/T Transceiver


MF-627



Description

Designed Super slim 10 Base-5/T Converter to connect your existing Thick Ethernet Network environment to a 10Base-T UTP network. The converter simply repeats signals from the Thick Ethernet to a suitable form for transmission over UTP wires to the 10Base-T HUB or similar HUB.

Application

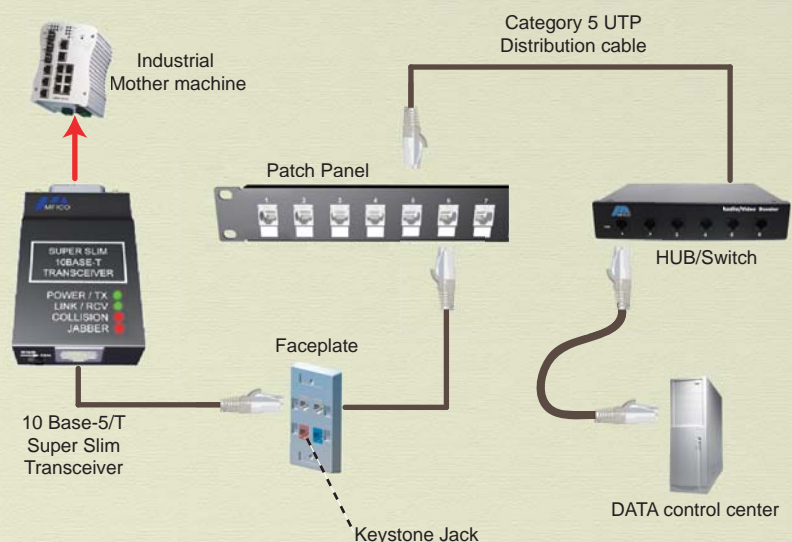

Specifications

Interface:	DB-15 male to 10 Base-5 RJ-45 Jack to 10 Base-T
Cable length:	100 m max. per UTP cable
LEDs:	Power/Tx, Col, Link/Rcv, Jabber
Temperature:	0 to 55 degree (standard operating)
Humidity:	10 to 90% (non-condensing)
Standard:	IEEE 802.3 10Base-5/T Ethernet
EMI:	Meets FCC Class A Subpart B of Part 15 Requirement
Technique:	Baseband
Dimensions:	3/4" x 2 3/5" x 1 3/8"

Features

- Super Slim design ideal for narrow slot spaces such as
- Sun Sparc, IBM RISC/6000 and Apple Macintosh workstations.
- SQE switch provided
- 4 LEDs for Link/Rcv, Collision, Power/TX, Jabber indicate status.
- No external power required.
- Converts existing Thick Ethernet Card/10Base-T application.

Item Number	Description
MF-627	Ethernet 10Base 5/T Transceiver Super Slim Type